


SPECIFICATIONS

| | |
|--------------------|--------------------------------------------------------------------------------|
| Product Dimensions | 660W x 554H x 330Dmm |
| Fascia Dimensions | 780W x 634H x 6D mm |
| Glass Size | 620W x 474H mm |
| Power Requirement | 3 pin earthed 230V power outlet or a hard wire connection that can be isolated |
| Heat Output | 1.5kW |
| Cord Length | 1.8m |

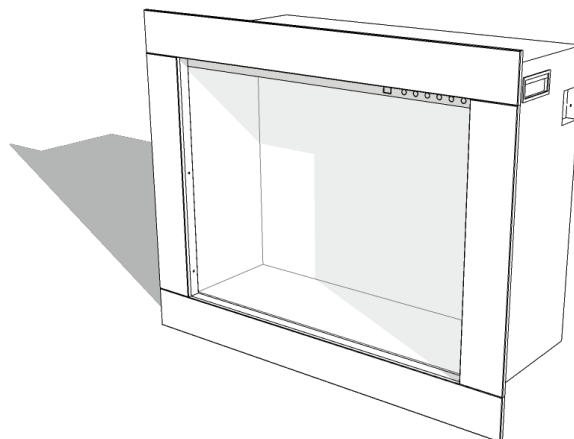

CLEARANCES

Chassis Clearance

The fire chassis is zero clearance rated. Heat resistant material is not required for install.

TV Clearance

TV can be installed **150mm** from above the glass

Cavity Base

This appliance **MUST** be fully supported on its base, over the entire area of the underside of the appliance. The base must also be level and strong enough to support the total product weight (42kgs).

Clearance to Combustible Materials

Keep combustible materials including bedding, curtains, and clothes at least 1m from the **front** of the fire.

FUELBEDS

The Ambe Square30 electric fireplace includes three interchangeable fuelbeds.



Clear Acrylic



Black Acrylic



White Stone

Available optional extras




Logs

CAVITY CONSTRUCTION & INSTALLATION PROCESS


Before installation, refer to installation manual for safety information.

Step 1

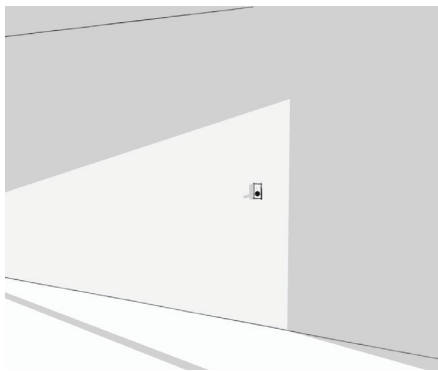


Find a suitable location with an electrical outlet within **1m** of the fireplace.

Step 2

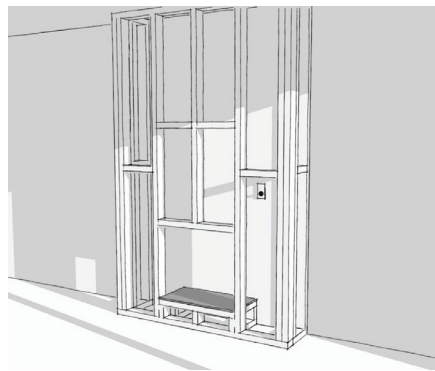


Construct the cavity to the desired size, allowing for the following wall opening dimensions: **676W x 570H x 350D mm**

Step 3

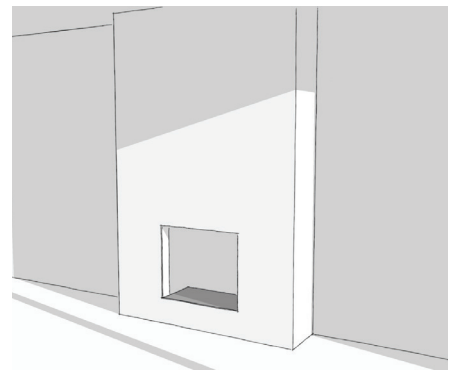


Install the selected wall linings or panels, cutting a hole following the wall opening size.

Step 4

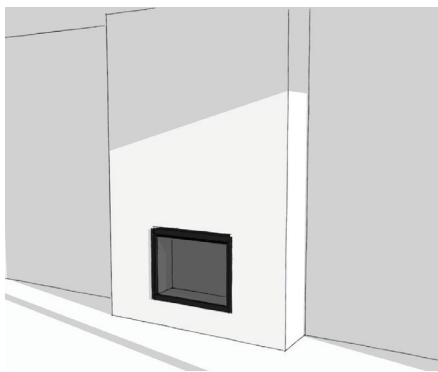

Insert the fireplace into the wall opening and align to the finished wall lining. Fix in place through the side brackets. Protect the glass panel until completion.

Step 5

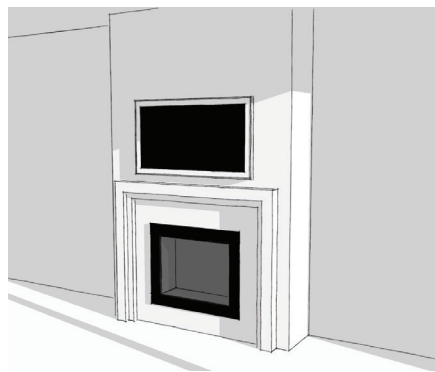

Fit the glass fascia to the fireplace. Finalise all finishes and fixtures to complete the project.